

DRY SPRINKLER ORDER FORM



Customer: _____

Ship to: _____


Date: _____

PO#: _____

Dry Sprinklers are custom made and are NOT RETURNABLE


To ensure an accurate order, please follow these steps:

1. Check the desired SIN (Sprinkler Identification Number).
2. Check desired sprinkler finish and temperature. (Circle temp and finish for fusible link models.)
3. Enter A or B dimensions. (See page 2 for dimensional references)
4. Enter order quantity.

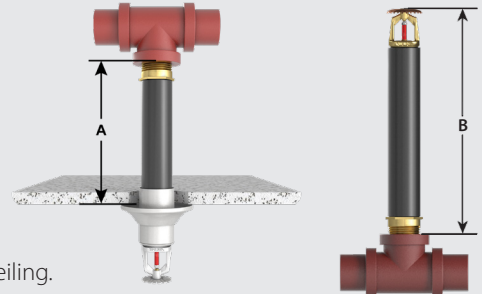

A Dimension is the distance from the face of the fitting (tee) to desired finished surface of ceiling.

B Dimension is the distance from the face of the fitting (tee) to the top of the deflector - upright models only.

Standard Adjustable	Pendent <input type="checkbox"/> MX8154 (SR) <input type="checkbox"/> MX8163 (SR LO) <input type="checkbox"/> MX8176 (QR) <input type="checkbox"/> MX8177 (QR LO) <input type="checkbox"/> MX8286 (QR LO*) *Fusible Link 165° 205° 280° Chrome White <i>(Circle temp and finish)</i>	ELO Pendent <input type="checkbox"/> MX8546 (SR ELO)* <input type="checkbox"/> MX8549 (QR ELO)* *Fusible Link 165° 205° 280° Chrome White <i>(Circle temp and finish)</i> Lengths in 6" increments, 12"-28" Note: Insulating boot included.	Horizontal Sidewall <input type="checkbox"/> MX8156 (SR) <input type="checkbox"/> MX8178 (QR)	Finish <input type="checkbox"/> Chrome (F) <input type="checkbox"/> White (M) <input type="checkbox"/> White w/chrome escutcheon & sleeve (MF) <input type="checkbox"/> ENT (JN) <input type="checkbox"/> Brass (A) (Horizontal Sidewalls only)
	Lengths in 1/2" increments			Temperature <input type="checkbox"/> 155°F (68°C) (B) <input type="checkbox"/> 175°F (79°C) (D) <input type="checkbox"/> 200 °F (93°C) (E) <input type="checkbox"/> 286°F (141°C) (G)

Concealed	Pendent <input type="checkbox"/> MX8194 (QR)	Finish <input type="checkbox"/> Chrome (F) <input type="checkbox"/> White (M) <input type="checkbox"/> Ivory (M-I) <input type="checkbox"/> Black (M-B)
	Lengths in 1/4" increments	

Recessed Adjustable	Pendent <input type="checkbox"/> MX8158 (SR) <input type="checkbox"/> MX8164 (SR LO) <input type="checkbox"/> MX8180 (QR)	ELO Pendent <input type="checkbox"/> MX8545 (SR ELO)* <input type="checkbox"/> MX8548 (QR ELO)* *Fusible Link 165° 205° 280° Chrome White <i>(Circle temp and finish)</i> Lengths in 6" increments, 12"-28" Note: Insulating boot included.	Horizontal Sidewall <input type="checkbox"/> MX8188 (SR**) <input type="checkbox"/> MX8182 (QR) <input type="checkbox"/> MX8188 (QR**)	Finish <input type="checkbox"/> Chrome (F) <input type="checkbox"/> White (M) <input type="checkbox"/> ENT (JN) <input type="checkbox"/> Brass (A) (MX8182 only)
	Lengths in 1/4" increments		**Ext. Coverage 155° 175° Brass Chrome White ENT <i>(Circle temp and finish)</i>	Temperature <input type="checkbox"/> 155°F (68°C) (B) <input type="checkbox"/> 175°F (79°C) (D) <input type="checkbox"/> 200 °F (93°C) (E)

Plain Barrel	Pendent <input type="checkbox"/> MX8172 (QR)	Finish <input type="checkbox"/> Chrome (F) <input type="checkbox"/> Brass (A) <input type="checkbox"/> ENT (JN) <input type="checkbox"/> White (M)
	Lengths in 1/2" increments	

A or B Dim:	Qty:

